MULTI-GLOBE CHANDELIER | INSTALLATION GUIDE

PRODUCT OVERVIEW & INSTALLATION

BEFORE YOU BEGIN

Switch off power at the circuit breaker and verify that the circuit is de-energized. Installation must be performed by a qualified electrician in accordance with local requirements.

FIXTURE OVERVIEW

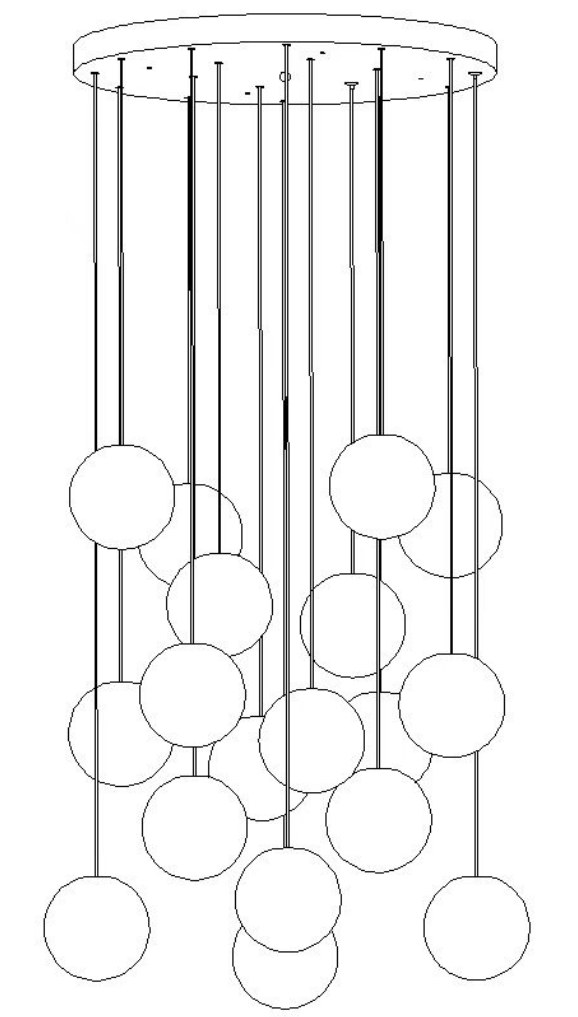


Illustration shows the fixture arrangement. Components may vary by model.

INSTALLATION SEQUENCE

01 ASSEMBLE THE FIXTURE

Attach the globe assemblies to their designated fittings. Check that each component is seated securely.

02 CHECK ELECTRICAL CONFIGURATION

Identify whether your fixture includes an LED driver. Verify the electrical rating and connection markings on the supplied unit.

03 INSTALL THE MOUNTING SUPPORT

Secure the mounting support to a suitable structural fixing point rated for the full weight of the chandelier.

04 CONNECT & SECURE

Have a qualified electrician complete the appropriate electrical connections, then secure the canopy and arrange the cables.

05 ADJUST & FINISH

Adjust the suspension cables, level the globes and fit the glass components. Check all connections before restoring power.

ELECTRICAL CONFIGURATION & FINAL CHECKS

CHECK THE PRODUCT RATING LABEL

This chandelier may be supplied in different electrical configurations. Before installation, confirm the voltage, frequency and electrical requirements shown on the rating label of the specific product supplied.

MODELS WITH AN LED DRIVER

Follow the input and output ratings and terminal markings on the supplied driver. The light sources must not be connected directly to mains power unless the product documentation explicitly permits it.

MODELS WITHOUT AN LED DRIVER

Electrical connections must follow the rating label and wiring information for the specific fixture. Do not assume that different versions have identical wiring requirements.

SUSPENSION CABLE ADJUSTMENT

TO LENGTHEN

Press the release collar on the cable adjuster and gently pull the suspension cable outward.

TO SHORTEN

Feed the cable inward through the adjuster. Confirm that all suspension cables are locked and that the fixture hangs level.

FINAL INSTALLATION CHECK

Confirm that the mounting is secure, all cables are locked, glass globes are correctly fitted and electrical connections have been checked. Restore power only after installation is complete.

NEED ASSISTANCE?

For product support, contact Stacehill with your product name and order details: info@stacehill.com